




64W UP&DOWN Profile



Model: 33/76 Light

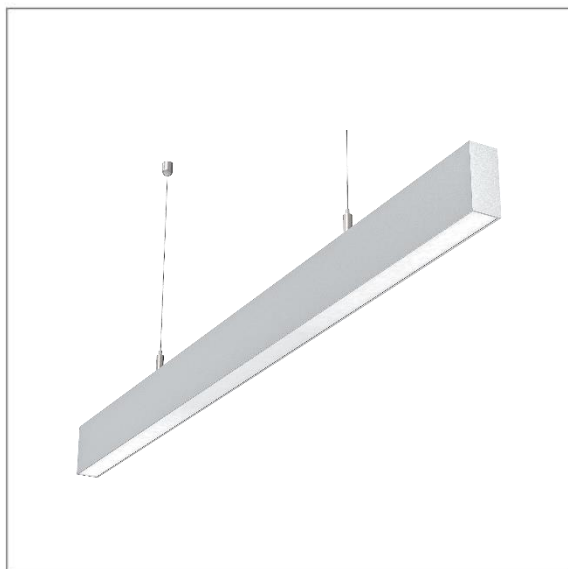

Ordering Data

Model	Finish	Power	CCT	CRI	CRI
33/76	Black White	64	3000 4000 6000	90	90

Diagram

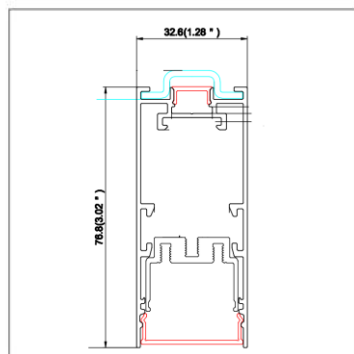

Technical Data

Light source	Samsung Optics
System wattage	40W Down 24W UP
Lumen flux	4000lm Down , 22000lm Up
Color temperature	Ra. 90
Color rendering index	4000K, 3000K, 6000K
Chromacity rate	Ra≤80
Beam angle	120D
Service lifetime	15D, 24D, TYFHYF, 50000hrs, L70
Ingress protection	IP20 installed
Operation voltage	220-240Vac, 50/60Hz
Operation temperature	-20~400
Protection class	I
finishing	White RAL9003
	Black RAL9005
Construction	Aluminum
Mounting	Hanging
WARRENTY	5 years
LIGHTING CONTROL	DALI / PUSH / 1-10 / 0-10
Driver	3AAA

Features

- PC Cover
- Dimming Option
- High Lumen per watt
- Samsung SMD

Accessories

- Hanging Kit
- Lens
- Blind cover

