



LED Switching Power Supply

- Protections: short circuit/over load/over voltage/over temperature
- Soothing start, soft light and eye protection , with four gears dimming mode
- Design for indoor installations
- Cooling by free air convection
- 100% full load burn-in test
- Suitable for internal lights application for I / II / III.
- Widely used in LED lighting and IT equipment
- Compliance to worldwide safety regulation for led lightings.



Type Approved
Safety
Regular Production
Surveillance
www.tuv.com
ID: 1111327294



R - 41123510
www.bis.gov.in



CE

CB

SELV

IP20




Specification

Model		YSD-300WHC-12	YSD-300WHC-24	YSD-300WHC-36	YSD-300WHC-48
OUTPUT	Output voltage	12VDC	24VDC	36VDC	48VDC
	Output voltage range	12VDC $\pm$ 0.5VDC	24VDC $\pm$ 0.5VDC	36VDC $\pm$ 0.5VDC	48VDC $\pm$ 0.5VDC
	Output current	Max 25A	Max 12.5A	Max 8.33A	Max 6.25A
	Output power	Max 300W			
	Output power range	0~300W			
	Ripple & Noise	$\leq$ 150mV	$\leq$ 200mV	$\leq$ 250mV	$\leq$ 300mV
	Linear Regulation	$\pm$ 1%			
	Load Regulation	$\pm$ 1%			
	Start-up Time (Typ)	500ms/230VAC 800ms/115VAC			
	Hold Up Time (Typ)	12ms/230VAC 10ms/115VAC			
INPUT	Input voltage	200-240Vac or 110-130Vac			
	Frequency	50/60Hz			
	Input current	2.6A/230Vac or 4.8A/115Vac			
	Powerfactor	PF>0.55			
	No-load power consumption	< 0.5W			
	Efficiency (typ.)	92%	92%	93%	94%
	Inrushcurrent(typ.)	Cold start 65A at 230Vac			
	Control surge capability	L,N:1KV L,N-PE:2KV			
ENVIRONMENT	Leakage current	Max. 0.5mA			
	Working temperature	ta: -30°C~ 50°C tc: 85°C			
	Working humidity	20 ~ 99%RH, non-condensing			
PROTECTION	Storage temp., humidity	-40°C ~ 80°C, 10~95%RH			
	Overtemperature	Protection type: Turn off the output voltage, after the temperature drops, re-energize to restore.			
	Over load protection	Shut down the output when current load $\geq$ 110%~150%, auto recovers.			
SAFETY & EMC	Short circuit protection	Protection type: It can be automatically restored after the fault is eliminated.			
	Withstand voltage	I/P-O/P:3000Vac			
	Isolation resistance	I/P-O/P: 100M Ω /500VDC/25°C/70%RH			
Reliability and Quality Control	Safety standards	IEC/EN61347;IEC/EN60950;IP20			
	EMC Test Standards	EN55015: 2013;EN61547: 2009; EN61000-3-2:2014; EN61000-3-3:2013			
NOTE	Impact aging	100% of the product is fully loaded and impacted for 4 hours under an environment of at least 40°C $\pm$ 5°C			
	Component derating	Under the steady-state conditions of rated input and output, the stress of components will not exceed its maximum nominal value			


1. All parameters not specifically mentioned are measured at 230VAC input, rated load and 25°C ambient temperature.
2. Ripple and noise test method: connect 0.1 μ F and 47 μ F capacitors in parallel at the terminal, and measure under 20MHZ bandwidth.
3. Ensure that the power supply is used under the rated parameters and environment.

Dimensions


Unit:mm

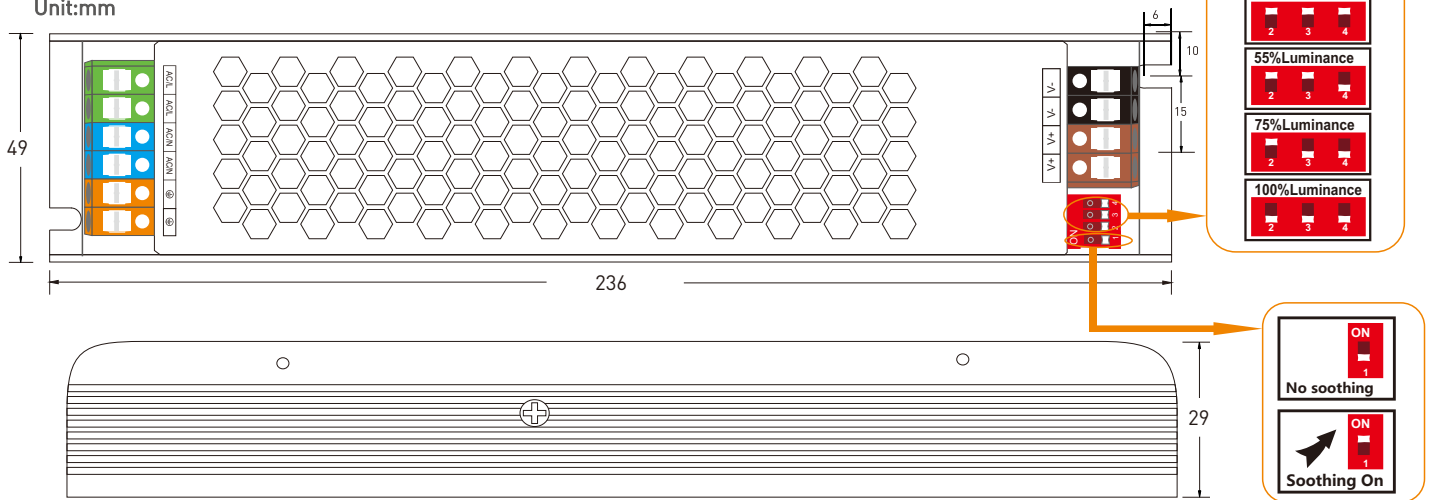


Relationship diagrams

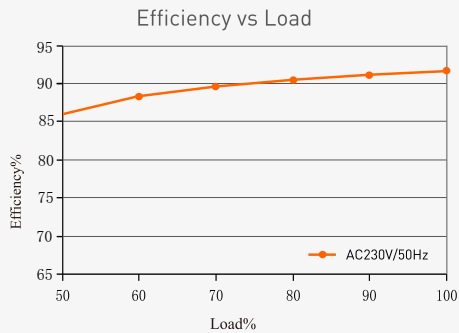


YSD-300WHC-12

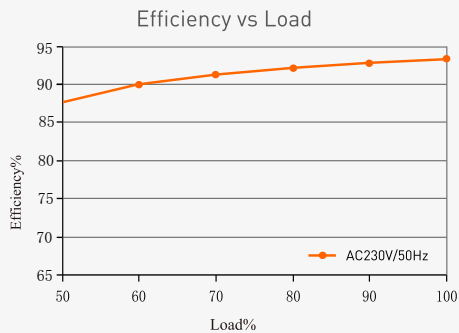

YSD-300WHC-36

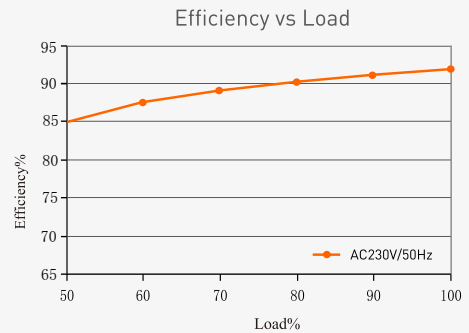


YSD-300WHC-24

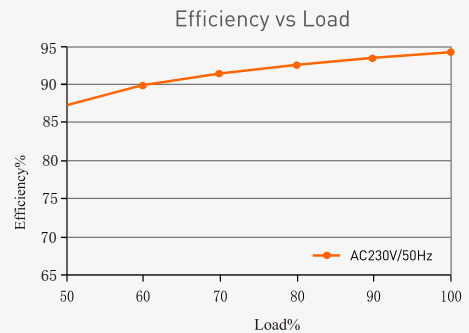

YSD-300WHC-48

Temperature load curve

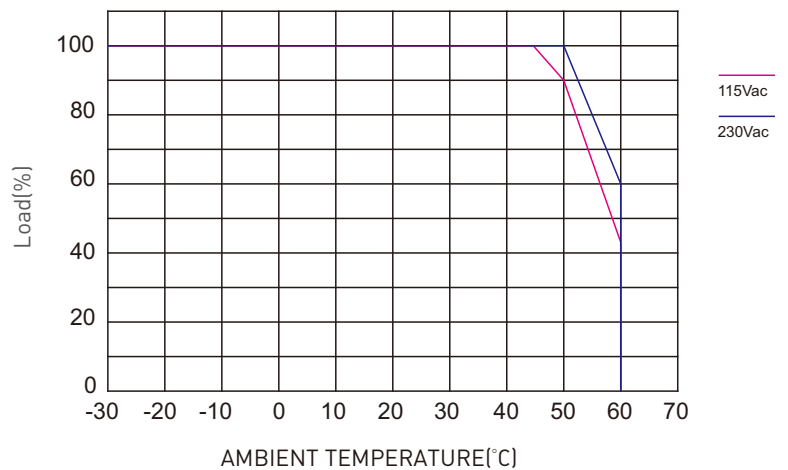

Packaging Information

DIMENSION	236x49x29mm(LxWxH)
PACKING	240x50x30mm(LxWxH)
CARTON QUANTITY	30PCS
CARTON SIZE	355x250x175mm(LxWxH)
WEIGHT	460g±10g/PCS