



12W NIR DOWNLIGHT

Model: DF-SP05MC123





Technical Data

LED source	Epistarled
System wattage	12W
Lumen flux	1000lm
Color temperature	3000K, 4000K, 6000K
Color rendering index	RA 80
Beam angle	36 degree
Service lifetime	5000hrs
Ingress protection	IP20 installed
Operation voltage	220-240Vac, 50/60Hz
Operation temperature	-20~400
Protection class	I
Mounting	Clips
WARRENTY	3 years

Ordering Data

DF-SP05MC					
Model	Finish	Power	CCT	CRI	CRI
	●	●	●	●	●
	Glod	12	3000	80	80
	White		4000		
	Black		6000		
	Copper				

Diagram

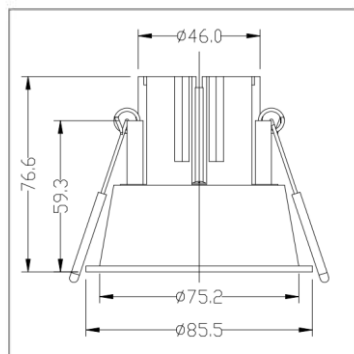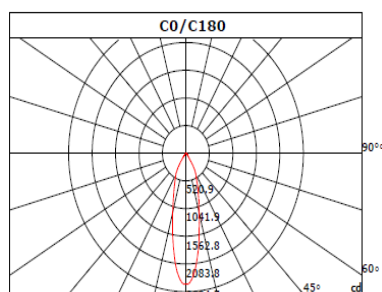

Features

- COB LED CHIP
- 3 YEARS WARRANTY
- Compact size
- Non Flicker

Accessories

- Power connector
- Profile clips

Height	Center lx	Diameter
1m	2419.04 lx	45.44cm
2m	604.51 lx	90.88cm
3m	268.67 lx	136.32cm
4m	151.13 lx	181.76cm
5m	96.72 lx	227.18cm
6m	67.17 lx	272.63cm
7m	49.35 lx	318.07cm
8m	37.78 lx	363.51cm
9m	29.85 lx	408.95cm
10m	24.18 lx	454.38cm
11m	19.88 lx	499.83cm
12m	16.79 lx	545.27cm
13m	14.31 lx	590.71cm
14m	12.34 lx	636.14cm
15m	10.75 lx	681.58cm
16m	9.45 lx	727.02cm